


PRODUCT SHEET VL 605

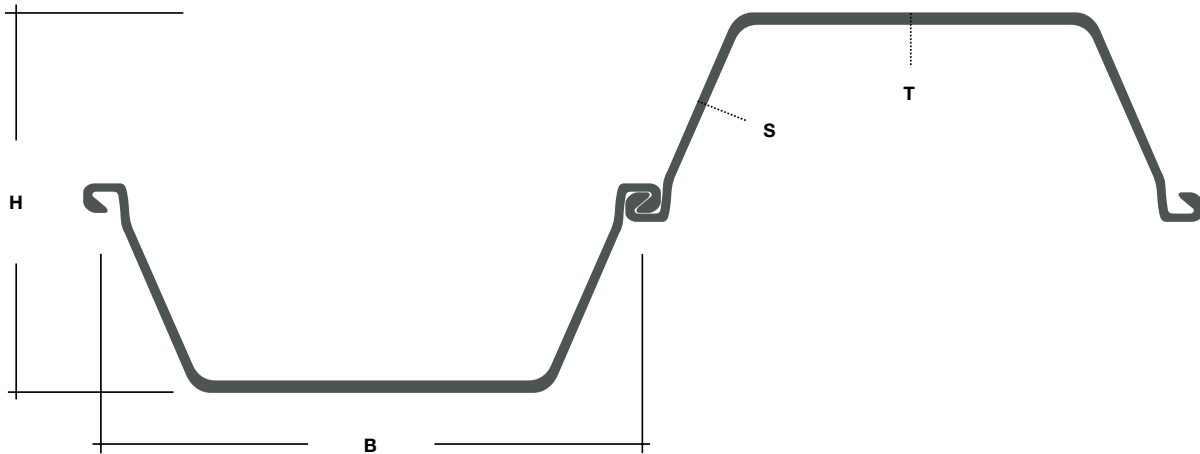

| Single Pile | | | | | per m of wall | | | | |
|-------------|--------|-------------------|-----------|-----|---------------|-------------------|----------------------|--------------------|-------------------------|
| Width | Height | Coating Area* | Thickness | | Weight | Weight | Cross Sectional Area | Moment of Inertia | Elastic Section Modulus |
| B | H | C | T | S | G | M | A | I _x | W _x |
| mm | mm | m ² /m | mm | mm | kg/m | kg/m ² | cm ² /m | cm ⁴ /m | cm ³ /m |
| 600 | 420 | 1.89 | 12.3 | 9.2 | 82.1 | 136.8 | 174.2 | 42,433 | 2,020 |

* two-sided coating single pile per meter excluding inside of interlocks