


## Product Sheet VL605N

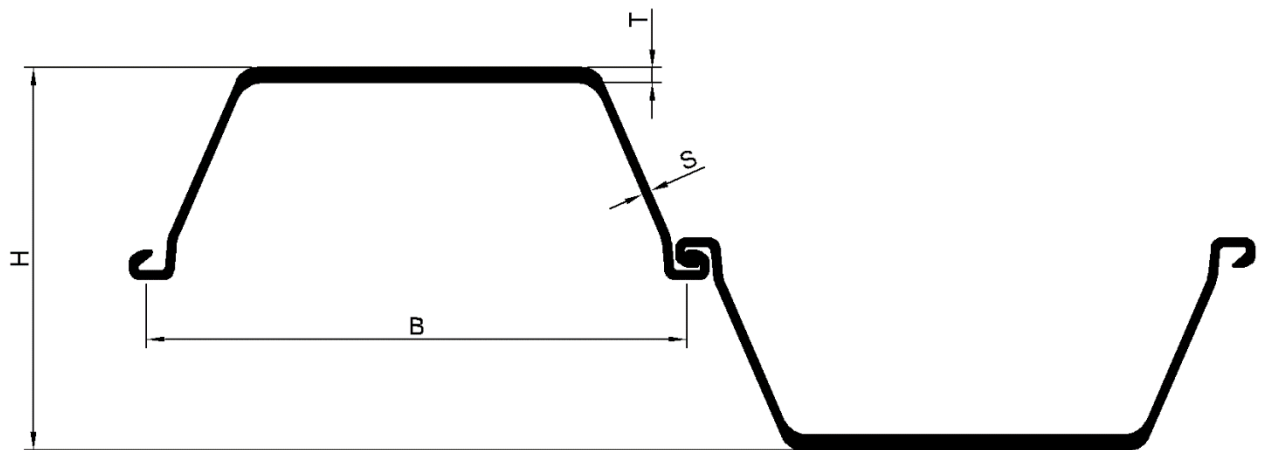

					Wall				
Width	Height	Thickness		Coating Area*	Weight Single Pile	Weight	Cross Sectional Area	Moment of Inertia	Elastic Section Modulus
B	H	T	S	C	G	M	A	I <sub>x</sub>	W <sub>x</sub>
mm	mm	mm	mm	m <sup>2</sup> /m	kg/m	kg/m <sup>2</sup>	cm <sup>2</sup> /m	cm <sup>4</sup> /m	cm <sup>3</sup> /m
<b>600</b>	<b>422.6</b>	<b>12.0</b>	<b>9.5</b>	<b>1,88</b>	<b>82.1</b>	<b>136.9</b>	<b>174.4</b>	<b>42664</b>	<b>2019</b>

\* two-sided coating single pile per meter excluding inside of locks