


U Profile Steel Sheet Piles

Section	Width	Height	Back Thickness	Web Thickness	Mass		Moment of Inertia	Section Modulus
	b mm	h mm	t mm	s mm	Kg/Lin mtr	Kg/m ² of Wall	I _y cm ⁴ /m	W _y ¹⁾ cm ³ /m
U Sections (Larsen Interlock)								
L601	600	310.0	7.5	6.4	46.3	77.2	11530	744
L602	600	310.0	8.4	7.6	53.4	89.0	13046	842
L603	600	320.0	9.6	8.2	64.2	107.0	19199	1200
L603N	600	422.6	9.1	7.3	59.7	99.6	27020	1279
L603 10/10	600	322.0	10.0	10.0	72.1	120.2	20930	1300
L604	600	390.0	10.0	9.0	73.1	121.8	31548	1618
L605A	600	420.0	10.7	9.0	76.5	127.5	38243	1821
L605	600	420.0	12.3	9.2	82.1	136.8	42433	2021
L606A	600	430.0	13.4	9.0	85.4	142.3	47402	2205
L623	600	431.0	14.4	9.4	89.8	149.7	50880	2356
L606	600	430.0	15.8	9.3	93.9	156.5	53785	2502
L626	600	431.0	16.5	9.5	96.6	161.0	56116	2602
L628	600	433.4	17.5	10.3	102.3	170.5	60112	2774
L607	600	456.5	19.0	10.6	112.4	187.3	73300	3211

- All sections available from rolling or stock
- Technical and Design Support
- Steel Grades S270, S355, S390, S430
- Painting, Clutch Sealant and Fabrication



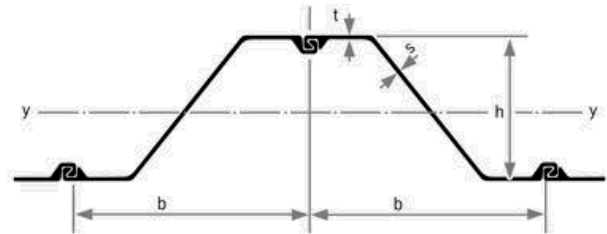

Z Profile Steel Sheet Piles

Section	Width	Height	Back Thickness	Web Thickness	Mass		Moment of Inertia	Section Modulus
	b mm	h mm	t mm	s mm	Kg/Lin mtr	Kg/m ² of Wall	I _y cm ⁴ /m	W _y ¹⁾ cm ³ /m
Z Sections								
EZ17	700	420.0	8.5	8.5	74.0	105.7	36360	1735
EZ18	700	420.0	9.0	9.0	77.4	110.6	37800	1805
EZ19	700	420.0	9.5	9.5	80.8	115.4	39420	1875
EZ19 10/10	700	422.0	10.0	10.0	84.2	120.3	40940	1945
EZ20	700	422.0	10.5	10.5	87.5	125.0	40960	2010
EZ24	700	459.0	12.0	9.0	89.5	127.9	55870	2435
EZ25	700	459.5	12.5	9.5	93.1	133.0	57828	2517
EZ26	700	460.0	13.0	10.0	96.7	138.1	59810	2600
EZ28	700	461.0	14.0	11.0	103.9	148.4	63750	2765
EZ36	700	509.0	14.0	11.5	116.2	166.1	91130	3580
EZ37	700	510.0	14.5	12.0	120.2	171.8	94000	3690
EZ38	700	510.0	15.0	12.5	124.2	177.4	96860	3800
EZ40	700	511.0	16.0	13.5	132.2	188.8	102590	4015
ZZ12-770	770	343.5	8.6	8.5	72.8	94.5	21496	1252
ZZ13-770	770	344.0	9.1	9.0	76.2	99.0	22433	1304
ZZ14-770	770	344.5	9.6	9.5	79.6	103.4	23370	1357
ZZ42-700	700	499.2	18.1	14.0	143.0	204.2	105543	4228
ZZ44-700	700	500.2	19.1	15.0	150.7	215.3	110942	4436
ZZ46-700	700	501.2	20.1	16.0	158.5	226.5	116159	4635

- All sections available from rolling or stock
- Technical and Design Support
- Steel Grades S270, S355, S390, S430
- Painting, Clutch Sealant and Fabrication



T: 01202 894 000

E: sales@maxxpiling.com

W: www.maxxpiling.com